

## Product Specifications

Caliper (mils/ µm)	Basis Weight	Brightness (UV Included)	Thermal Response - Nominal				Gurley Stiffness Nominal (mg)		Elmendorf Tear Nominal (g)		Parker Print Surf
			Static - (°C ± 5°)		Dynamic - Atlantek 400 (mJ/mm2)		MD:	CD:	MD:	CD:	
			0.2 ODU	91	0.2 ODU	4.8					
2.60 ± 0.13/66 ± 4	17 x 22— 500 (lbs)	>85	0.2 ODU	91	0.2 ODU	4.8	42	20	37	43	<2.00
	14.6 ± 0.8		1.0 ODU	132	1.0 ODU	9.2					
	g/m2		Max. Density	1.26	Max. Density	1.53					
	54.9 ± 2.9		Required Temp.	149	Energy Req.	16.0					

### Features:

- Good for general imaging


### Environmental Characteristics:

- Produced without the use of bisphenol A (BPA)

### Ideal For:

- Economy point-of-sale for retail use
- Printer
- Facsimile
- Calculator
- Parking receipts
- ATM receipts
- Gas pump receipts

### Dynamic Sensitivity

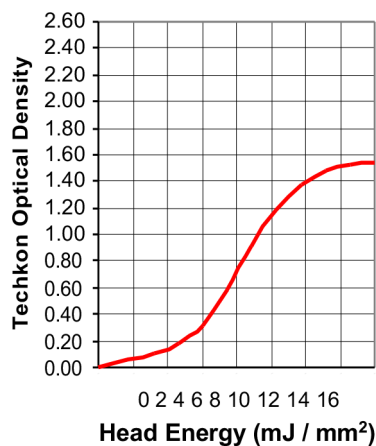

### Static Sensitivity

