

# Alpha® 400-2.6



## Product Specifications

Caliper (mils/ µm)	Basis Weight	Brightness (UV Included)	Thermal Response - Nominal				Gurley Stiffness Nominal (mg)		Elmendorf Tear Nominal (g)		Parker Print Surf
			Static - (°C ± 5°)		Dynamic - Atlantek 400 (mJ/mm <sup>2</sup> )		MD:	CD:	MD:	CD:	
			0.2 ODU	84	0.2 ODU	4.7					
2.60 ± 0.15/66 ± 4	17 x 22— 500 (lbs)	>85	1.0 ODU	134	1.0 ODU	8.6	42	20	37	43	<2.00
	g/m <sup>2</sup>		Max. Density	1.25	Max. Density	1.5					
	56.2 ± 3.0		Required Temp.	149	Energy Req.	16.0					

### Features:

- Good for general imaging


### Environmental Characteristics:

- Produced without the use of bisphenol A (BPA)

### Ideal For:

- Economy point-of-sale for retail use
- Printer
- Facsimile
- Calculator
- Parking receipts
- ATM receipts
- Gas pump receipts

**Dynamic Sensitivity**

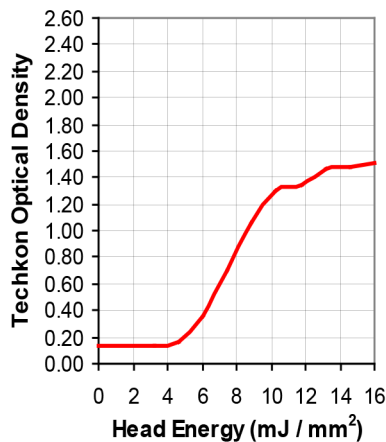

**Static Sensitivity**

