

Alpha® 800-3.4

Product Specifications

Caliper (mils/ µm)	Basis Weight	Brightness (UV Included)	Thermal Response - Nominal				Gurley Stiffness Nominal (mg)		Elmendorf Tear Nominal (g)		Parker Print Surf
			Static - (°C ± 5°)		Dynamic - Atlantek 400 (mJ/mm ²)		MD:	CD:	MD:	CD:	
			0.2 ODU	84	0.2 ODU	4.7					
3.40 ± 0.30/86 ± 10	17 x 22— 500 (lbs)	>85	0.2 ODU	84	0.2 ODU	4.7	100	50	50	50	<2.20
	19.8 ± 1.0		1.0 ODU	127	1.0 ODU	7.7					
	g/m ²		Max. Density	1.38	Max. Density	1.77					
	74.4 ± 3.9		Required Temp.	149	Energy Req.	13.1					

Features:

- 800-sensitivity
- Bar code and graphics imaging
- Bright white appearance
- Flexographic printable front and back
- Lithographic printable back side only


Ideal For:

- Point-of-sale receipts
- ATM receipts
- Kiosks
- Parking receipts
- Airline check-in kiosks
- High speed facsimile
- Charting

Environmental Characteristics:

- Produced without the use of bisphenol A (BPA)

Dynamic Sensitivity

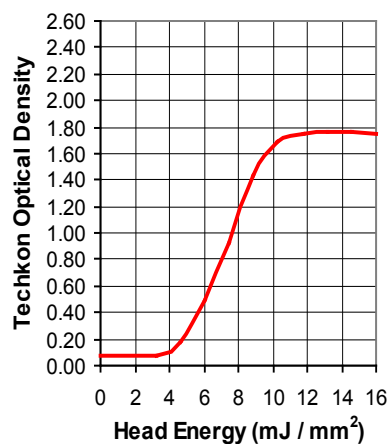

Static Sensitivity

