

ReSound ENZO 3D™



ET 88-DWH

Product Description

ReSound ENZO 3D is a complete super power hearing solution. It provides high levels of amplification without feedback. It offers exceptional clarity and sound quality, and balances improved hearing in noise with preserved access to environmental sounds.


The Smart Range C platform in ReSound ENZO 3D supports our 5th generation of 2.4 GHz wireless technology. This allows ear-to-ear communication along with direct connection to the new ReSound Smart 3D™ app, and lets the hearing aids connect wirelessly to iPhone, iPad, iPod touch, and select Android models* via Bluetooth 4.0.

It also includes the industry first ReSound Assist, which brings you even closer to your clients by offering fine-tuning and hearing aid update opportunities remotely via secure cloud technology.

The ReSound ENZO 3D HP BTE hearing aids are iSolate™ nanotech coated for optimum durability and meet the IP58 classification for ingress protection.

*See more on resound.com/compatibility

Fitting Range

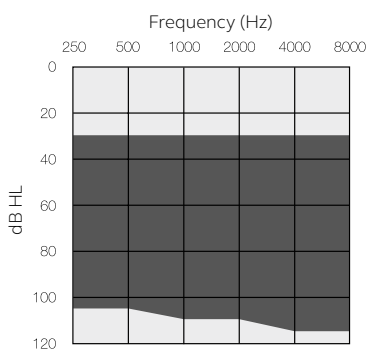

Model	ET988-DWH	ET788-DWH	ET588-DWH
Device Configurations			
Battery size		13	
Colors available		10	
Audiological Features			
WARP compression (WDRC) - number of channels	17	14	12
Binaural Directionality III	●	-	-
Spatial Sense	●	-	-
Binaural Directionality	-	●	-
Natural Directionality II	●	●	●
Directional Mix Processor	●	●	●
-Adjustable directional mix	●	-	-
Synchronized SoftSwitching	●	●	-
SoftSwitching	●	●	●
Autoscope Adaptive Directionality	●	-	-
Multiscope Adaptive Directionality	-	●	-
Adaptive Directionality	-	-	●
Binaural Environmental Optimizer II	●	-	-
Environmental Optimizer	-	●	-
NoiseTracker II	●	⊙	○
Expansion	●	⊙	○
Windguard	●	⊙	○
Sound Shaper	●	●	●
DFS Ultra II	●	●	●
-Music Mode	●	●	●
LowFrequency Boost	●	⊙	○
Amplification strategy (WDRC/Semi-Linear/Linear)	●	●	⊙
Synchronized Acceptance Manager	●	●	●
Tinnitus Sound Generator	●	●	●
Functional Features			
Synchronized Push Button	●	●	●
Synchronized Volume Control	●	●	●
Smart Start	●	●	●
Phone Now	●	●	●
Comfort Phone	●	●	●
Ear to Ear Communication	●	●	●
Direct audio streaming (Made for iPhone)	●	●	●
ReSound TV Streamer 2, Remote Control 2, Phone Clip+, Micro Mic and Multi Mic	●	●	●
ReSound Control™ app (Phone Clip+ is required)	●	●	●
ReSound Smart 3D™ app	●	●	●
ReSound Assist			
Remote Fine Tuning	●	●	●
Remote Firmware Updates	●	●	●
Fitting Features			
Fitting Software Smart Fit™ 1.1 or higher	●	●	●
Fully Flexible Programs	4	4	4
Auto DFS	●	●	●
Onboard Analyzer II	●	●	●
Wireless Fitting with Noahlink Wireless	●	●	●

○ Basic
⊙ Advanced
● Ultimate



ReSound ENZO 3D is compatible with iPhone 7 Plus, iPhone 7, iPhone 6s Plus, iPhone 6s, iPhone 6 Plus, iPhone 6, iPhone SE, iPhone 5s, iPhone 5c, iPhone 5, iPad Pro (12.9-inch), iPad Pro (9.7-inch), iPad Air 2, iPad Air, iPad mini 4, iPad mini 3, iPad mini 2, iPad mini, iPad (5th generation), iPad (4th generation), iPod touch (6th generation) and iPod touch (5th generation) using iOS 8.X or later.

© 2017 GN Hearing A/S. All rights reserved. Apple, the Apple logo, iPhone, iPad Pro, iPad Air, iPad mini, iPad and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. Android is a trademark of Google Inc. The Bluetooth word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc.




Technical Specifications

ET 88-DWH


		IEC 60118-0 IEC 711 Ear simulator	IEC 60118-7 ANSI S3.22 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	59	52	dB
Full-on gain (50 dB SPL input)	Max.	80	73	dB
	1600 Hz/HFA	73	68	
Maximum output (90 dB SPL input)	Max.	140	132	dB SPL
	1600 Hz/HFA	135	129	
Total harmonic distortion	500 Hz	1.1	0.8	%
	800 Hz	1.2	0.6	
	1600 Hz	0.7	0.4	
Telecoil sensitivity (1 mA/m input)	Max.	106		dB SPL
	HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	112	
	Full-on telecoil sensitivity @ 1mA/m	1600 Hz/HFA	99	
Equivalent input noise		22	23	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction		11	-	dB SPL
Frequency range (DIN 45605/ANSI)		100-5960	100-4740	Hz
Current drain		1.1/1.3	1.2/1.4	mA

Patents pending

Maximum Output (OSPL 90)

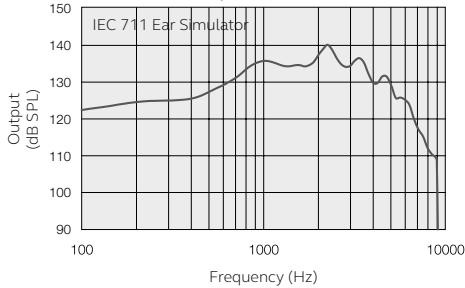

Maximum Output (OSPL 90)

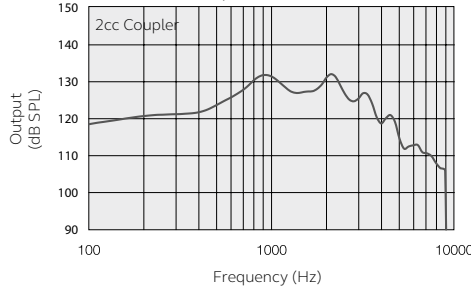


Notes:
O.E.S. = Occluded Ear Simulator
2cc = 2 cm³ coupler


Basic settings:
Full-on Gain, Reference Test Gain
MPO = Maximum Power Output
Maximum Band Width

All specifications are subject to change without notice

Full-On and Reference Test Gain

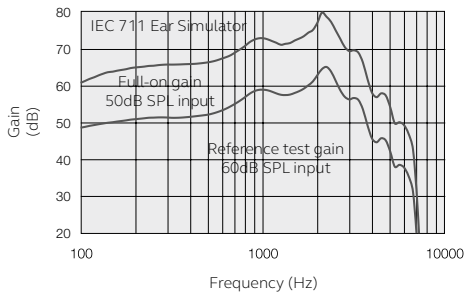


Full-On and Reference Test Gain

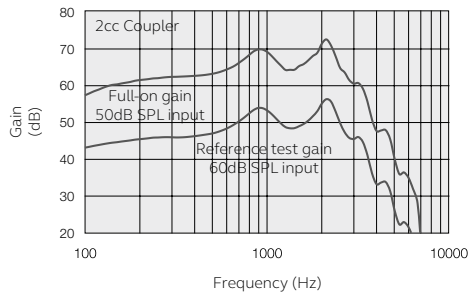


Measured according to IEC 60118-0, Edition 3 2015-06 at 1.3V, impedance 6.2 ohms and 23°C on O.E.S. according to IEC60318-5 2006. Response on 2cc according to IEC 60118-7 2nd edition, 2005-10 and ANSI S3.22-2009 (HFA average calculated at 1,000Hz, 1,600Hz, and 2,500Hz); 0 dB SPL sound pressure equals 20µPa. All measurements without DSP and features activated unless indicated otherwise.

Input/Output Response



Full-On Telecoil Response
Input level 10 mA/m

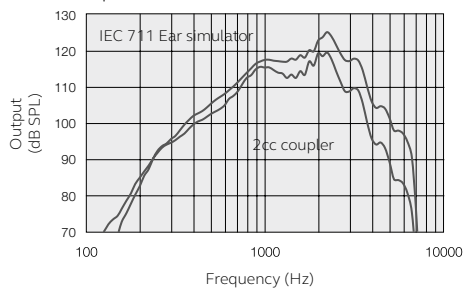

400739000GB-17.09-Rev.C

ReSound A/S
Lautrupbjerg 7
DK-2750 Ballerup, Denmark
Tel.: +45 45 75 11 11
resound.com

United Kingdom
GN ReSound Ltd.
Kirtlington Business Centre
Portway
Kirtlington
Oxon OX5 3JA
Tel.: +44 1869 352 800
resound.com

Australia
GN ReSound Pty. Ltd.
Unit R1 Regent Park Estate
391 Park Road
Regent Park NSW 2143
Tel.: 02 9743 9707
Free call number: 1800 658 955
resound.com

New Zealand
GN ReSound (NZ) Ltd.
Ground Floor, North Entrance
4 Fred Thomas Drive
Takapuna
Auckland, 0622
Tel.: (free) 0800 900 126
resound.com

Singapore
GN Hearing Pte. Ltd.
2 Kallang Avenue
#07-19 CT HUB
Singapore - 339407
Tel: +65 6320 9388
resound.com

