



## Product Description

Based on our most advanced chip platform, the ReSound LiNX Quattro hearing aids features an extended bandwidth of up to 9.5 kHz and a higher input dynamic range of up to 116 dB SPL. Combined with our renowned ReSound audiological heritage, including Binaural Directionality III and Spatial Sense, the solution provides more of the finer sound details for a clearer, fuller and richer sound experience.


ReSound LiNX Quattro is a 6th generation, 2.4 GHz wireless hearing aid that offers direct audio streaming from iOS and Android™\* devices. With ReSound Assist and the ReSound Smart 3D™ app, you can provide remote fine-tuning services for your clients.

The Behind-the-Ear (BTE) model 88 hearing aid comes with telecoil and Direct Audio Input (DAI) functionality as standard, and it also supports the full line of ReSound wireless accessories.

ReSound LiNX Quattro BTE hearing aids are iSolate™ nanotech-coated for optimum durability and meet the IP68 classification for ingress protection.

\*Compatible from Android version 10 and Bluetooth® 5.0 with the Android streaming to hearing aids feature.

Fitting Range

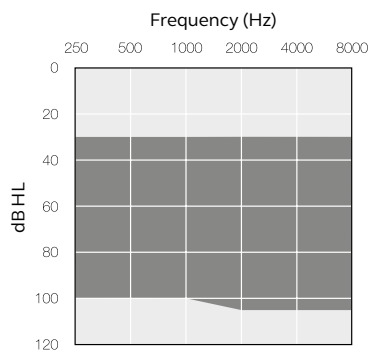


Model	RE988-DWT	RE788-DWT	RE588-DWT
<b>Device Configurations</b>			
Battery size	13		
Colours available	14		
<b>Audiological Features</b>			
WARP compression (WDRC) - number of channels	17	14	12
Binaural Directionality III	●	-	-
Spatial Sense	●	-	-
Binaural Directionality	-	●	-
Natural Directionality II	●	●	●
Directional Mix Processor	●	●	●
Adjustable directional mix	●	-	-
Synchronised Soft Switching	●	●	-
Soft Switching	●	●	●
Autoscope Adaptive Directionality	●	-	-
Multiscope Adaptive Directionality	-	●	-
Adaptive Directionality	-	-	●
Binaural Environmental Optimiser II	●	-	-
Environmental Optimiser	-	●	-
Noise Tracker II	●	⊙	○
Expansion	●	⊙	○
Impulse Noise Reduction	●	●	-
Wind Guard	●	⊙	○
Sound Shaper	●	●	●
DFS Ultra II	●	●	●
Music Mode	●	●	●
Synchronised Acceptance Manager	●	●	●
Low Frequency Boost	●	⊙	○
Amplification Strategy (WDRC/Semi-Linear/Linear)	●	●	⊙
Tinnitus Sound Generator	●	●	●
<b>Functional Features</b>			
Synchronised Push Button	●	●	●
Synchronised Volume Control	●	●	●
Smart Start	●	●	●
Phone Now	●	●	●
Comfort Phone	●	●	●
Ear to Ear Communication	●	●	●
Direct audio streaming	●	●	●
ReSound TV Streamer 2, Remote Control, Remote Control 2, Phone Clip+, Micro Mic and Multi Mic	●	●	●
ReSound Smart 3D™ app	●	●	●
<b>ReSound Assist</b>			
Remote Fine Tuning	●	●	●
Remote Firmware Updates	●	●	●
<b>Fitting Features</b>			
ReSound Smart Fit™ 1.6 or higher	●	●	●
Fully Flexible Programs	4	4	4
Auto DFS	●	●	●
Onboard Analyser II	●	●	●
Wireless Fitting with Noahlink Wireless	●	●	●

○ Basic

⊙ Advanced

● Ultimate



© 2019 GN Hearing A/S. All rights reserved. ReSound is a trademark of GN Hearing A/S. Apple, the Apple logo, iPhone, iPad and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. Android is a trademark of Google LLC. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.

# Technical Specifications

## RE88-DWT






		IEC 60118-0 2nd IEC 711 Ear simulator	IEC 60118-0 3rd IEC 60118-7 ANSI S3.22 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	56	53	dB
Full-on gain (50 dB SPL input)	Max.	74	68	dB
	1600 Hz/HFA	68	62	
Maximum output (90 dB SPL input)	Max.	141	134	dB SPL
	1600 Hz/HFA	135	130	
Total harmonic distortion	500 Hz	0.7	2.6	%
	800 Hz	0.5	0.2	
	1600 Hz	0.6	0.5	
	3200 Hz	-	0.2	
Telecoil sensitivity (1 mA/m input)	Max.	104	97	dB SPL
	HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	118	
	Full-on telecoil sensitivity @ 1mA/m	1600 Hz/HFA	97	
Equivalent input noise, w/o Noise reduction		23	23	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction		13	13	dB SPL
Frequency range IEC 60118-0: 2015		100-6540*	100-5160	Hz
Current Drain (Quiescent / Operating)		1.18/1.28	1.18/1.4	mA

Data in accordance with IEC 60118-0 Edition 3.0 2015-06, IEC 60118-7 and ANSI S3.22-2009, supply Voltage 1.3V

\* Measured according to IEC60118-0:2015, with 711-Ear simulator coupler.

ANSI S3.22-2014  
IEC 60118-0:2015  
JIS C 5512: 2015  
2cc coupler

IEC 60118-0: 1983\_AMD1:1994  
IEC 711 Ear Simulator

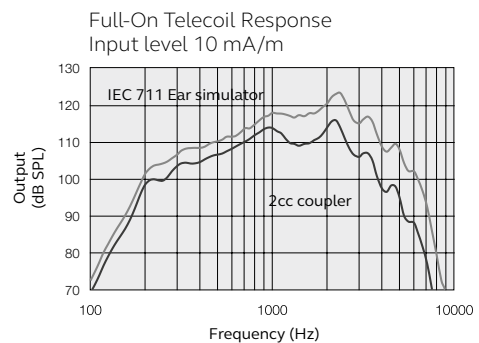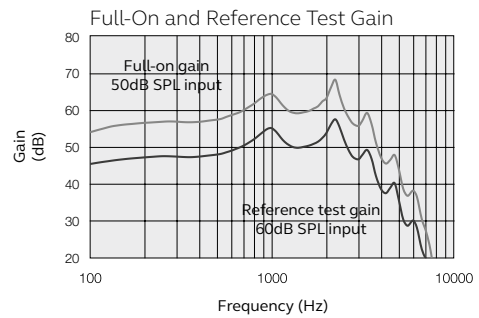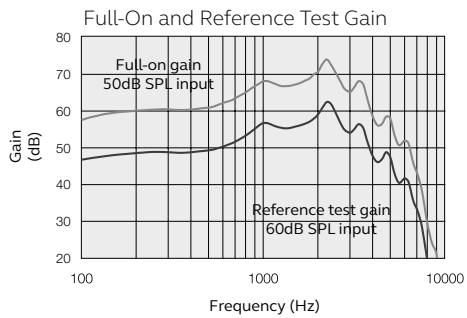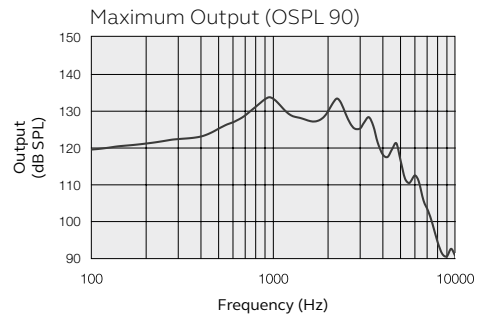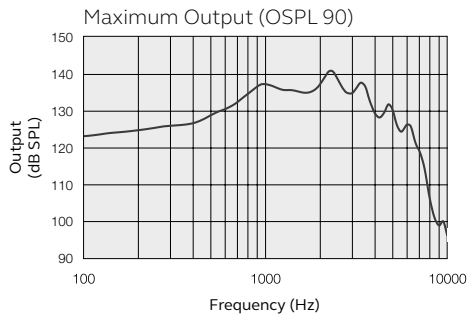

Patents pending

All specifications are subject to change without notice

401234000GB-19.12-Rev.B

Worldwide Headquarters  
GN ReSound A/S  
Lautrupbjerg 7  
DK-2750 Ballerup  
Denmark  
Tel.: +45 4575 1111  
resound.com

United Kingdom  
GN Hearing UK Ltd.  
Kirtlington Business Centre  
Portway, Kirtlington  
Oxon OX5 3JA  
Tel.: +44 1869 352 800  
resound.com

Australia  
GN Hearing Australia Pty Ltd  
Gate C, 19-25 Khartoum Road  
Macquarie Technology Park  
Macquarie Park NSW 2113  
Tel.: (free) 1800 658 955  
resound.com

New Zealand  
GN Hearing New Zealand Limited  
Ground Floor, North Entrance  
4 Fred Thomas Drive  
Takapuna, Auckland, 0622  
Tel.: (free) 0800 900 126  
resound.com

Singapore  
GN Hearing Pte. Ltd.  
2 Kallang Avenue  
#07-19 CT HUB  
Singapore - 339407  
Tel.: +65 6320 9388  
resound.com

CVR no. 55082715