

SUBMITTAL DATA SHEET

TripleGuard Active Automatic Appliance
Leak Shutoff (Product Code 97720)

Project Information:

Job Name:

Location:

Engineer:

Submitted to:

For: Reference Approval Construction

Submitted by:

Reference:

Submittal Information:

Approval:

Date:

Construction:

Unit #:

Drawing #:

(Sec. I) Product Specifications:

Material of Construction	Polycarbonate-ABS, PTFE Seals Body: SS304
Dimensions	5.31 x 4.92 x 2.95 inches (134.87 x 124.97 x 74.93 mm)
Weight	2 lbs
Power Supply	Two 3-V batteries (CR123)
Operation Voltage	3 V
Battery Life Span	Up to four years* *subject to the usage profile and valve use frequency. Manufacturer recom- mends to visually inspect batteries every year.
Flood Detector	9.84 ft (3 m) cable length
Standards	ISO 9001
Certifications	NSF372
Pressure Rating	200 PSI
Working temperature	-4°F to 122°F (-20°C to 50°C)

(Sec. II) Ordering Information:

Product Code	97720
Carton Qty	1
Carton Weight	2 lbs


(Sec. III) Carton Contents:

One Shutoff valve
One detector with 10 ft cord

(Fig. I) Product Image:



(Fig. II) Unit Descriptions:

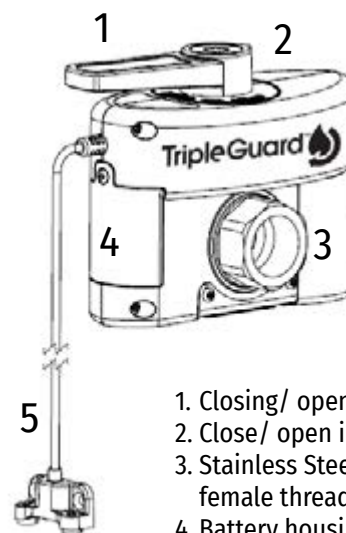

1. Closing/ opening handle
2. Close/ open indication
3. Stainless Steel Entry/Exit 3/4" female thread ball valve
4. Battery housing; 2 X CR123
5. Leak Detector with 10 ft cord

RectorSeal® 2601 Spenwick Drive - Houston, TX 77055 800-231-3345 rectorseal.com

A CSW Industrials Company. RectorSeal, the logos and other trademarks are property of RectorSeal, LLC, its affiliates or its licensor's and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. RectorSeal reserves the right to change specifications without prior notice. ©2020 RectorSeal. All rights reserved. R50310-0320

(RectorSeal's products are subject to continuous improvements; RectorSeal reserves the right to modify product design, specifications & information in this data sheet without notice and without incurring any obligations)