



A CSW Industrials Company

# TRUaire 1056FB Series

## R6 Molded Fiberglass Insulated Back


Model:	Size:
<b>Project Information:</b>	
Job Name:	
Location:	
Engineer:	
Submitted to:	
For:	Reference
Approval	
Construction	
Submitted by:	
Reference:	
<b>Submittal Information:</b>	
Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

### (Sec. I) Features

- Molded R6 Fiberglass Insulation with aluminum Foil vapor Barrier
- Pre-Scored Allows for Field Cutting with No Measuring
- Meets UL723 (ASTM E84) 25/50 Flame/Smoke Spread
- Meets UL 181 Erosion and Impact Test
- Meets UL 181 for Mold Resistant

Model	Dimensions		Scored Duct Diameters
	A	B	
1056FB 12 Mold	11 3/4"	2 5/8"	4", 6" & 8"
1056FB Mold	23 3/4"	3 3/16"	6", 8", 10", 12" & 14"

(Fig. I) Product Image:

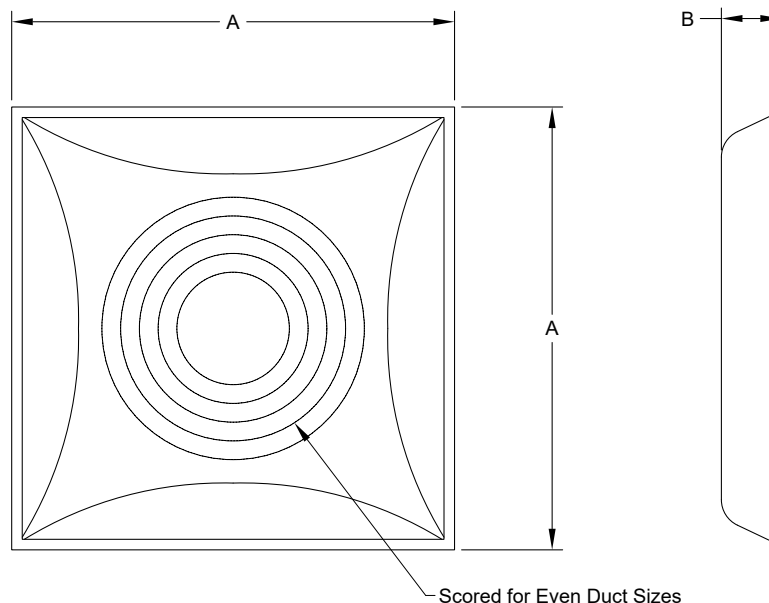

Note: This submittal is meant to demonstrate the general dimensions of this product. The illustrations are not meant to detail every aspect of the product. Drawings are not to scale.



**RectorSeal® • 2601 Spenwick Drive • Houston, TX 77055 • 800-231-3345 • [rectorseal.com](http://rectorseal.com)**

A CSW Industrials Company. RectorSeal, the logos and other trademarks are property of RectorSeal, LLC, its affiliates or its licensors and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. RectorSeal reserves the right to change specifications without prior notice. ©2023 RectorSeal. All rights reserved. R50956-0323