

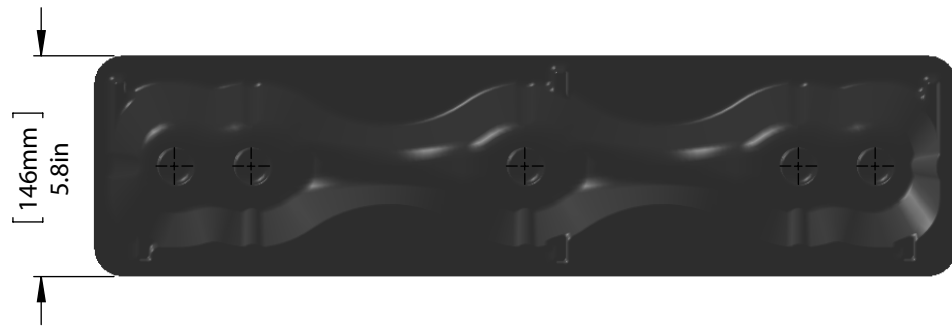


C



C

B

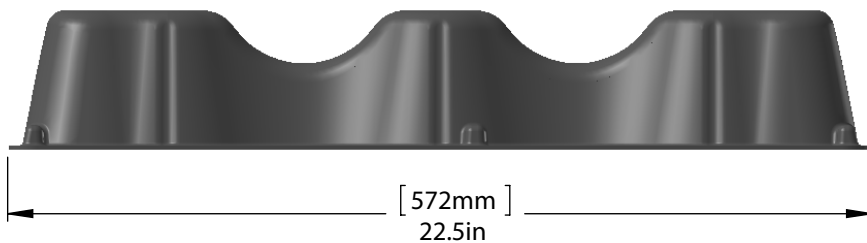

B

NOTES:

- Extreme Temperature Durability (-40°F to 260°F).
- High Tensile Strength.
- Crack/Split/Leak/Rust Resistant.
- Self Extinguishing.
- Made With Pride in the USA

UNLESS OTHERWISE SPECIFIED:	PROPRIETARY AND CONFIDENTIAL
DIMENSIONS ARE IN INCHES	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF RECTORSEAL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF RECTORSEAL IS PROHIBITED.
TOLERANCES:	
FRACTIONAL ±.032	
ANGULAR: MACH ±.5° BEND ±2°	
TWO PLACE DECIMAL ±.010	
THREE PLACE DECIMAL ±.005	
INTERPRET GEOMETRIC TOLERANCING PER: ANSI Y14.5, 1994	

ENGINEERING	NAME	DATE
DRAWN BY ENG.	DS	6/8/2010
CHECKED BY ENG.	JK	6/8/2010
ENG APPR.	CC	6/8/2010
MFG APPR.	CC	6/8/2010



2601 Spenwick Drive,
Houston, TX 77055
800-231-3345

A

TITLE: AG-GFR 23.5 x 4 SPECIFICATION SHEET		
SIZE A	SCALE: 1:5	SHEET 1 OF 1