

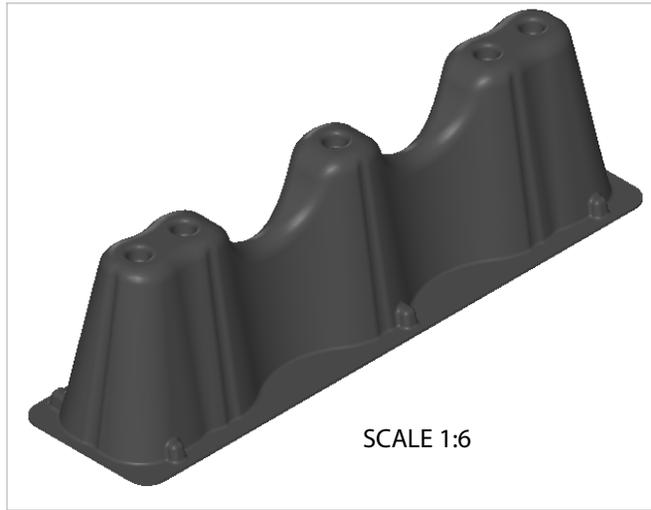


C



C

B

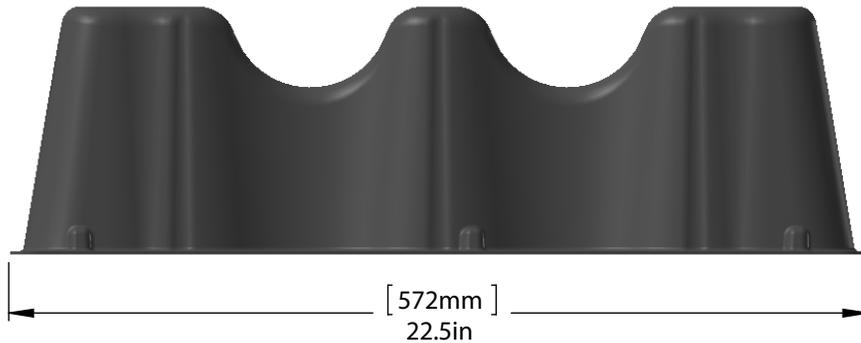

B

**NOTES:**

- Extreme Temperature Durability (-40°F to 260°F).
- High Tensile Strength.
- Crack/Split/Leak/Rust Resistant.
- Self Extinguishing.
- Made With Pride in the USA

UNLESS OTHERWISE SPECIFIED:	PROPRIETARY AND CONFIDENTIAL
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ±.032 ANGULAR: MACH ±.5° BEND ±2° TWO PLACE DECIMAL ±.010 THREE PLACE DECIMAL ±.005	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF RECTORSEAL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF RECTORSEAL IS PROHIBITED.
INTERPRET GEOMETRIC TOLERANCING PER: ANSI Y14.5, 1994	

ENGINEERING	NAME	DATE
DRAWN BY ENG.	DS	11/23/10
CHECKED BY ENG.	DS	11/23/10
ENG APPR.	DS	11/23/10
MFG APPR.	DS	11/23/10



2601 Spenwick Drive,  
Houston, TX 77055  
800-231-3345

A

**TITLE:**

AG-GFR 23.5 x 7 SPECIFICATION SHEET

SIZE  
**A**

SCALE: 1:5

SHEET 1 OF 1