

5

4

3

2



1

C

B

C

B

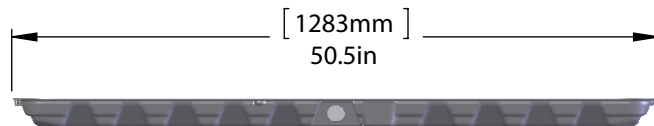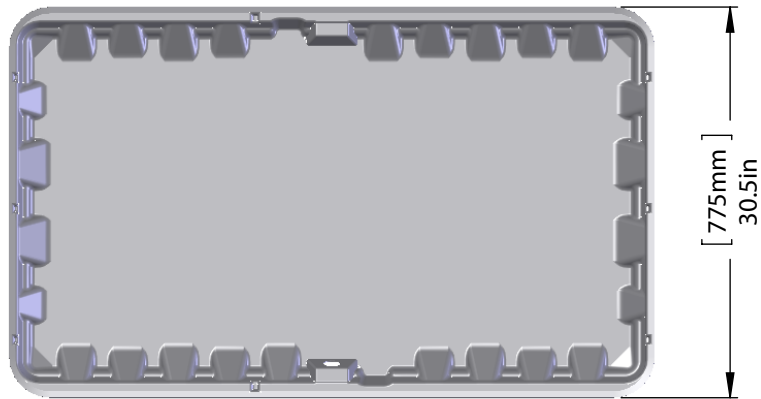

NOTES:

- Extreme Temperature Durability (-40°F to 260°F).
- High Tensile Strength.
- Crack/Split/Leak/Rust Resistant.
- Self Extinguishing.
- Made With Pride in the USA

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
 TOLERANCES:
 FRACTIONAL ±.032
 ANGULAR: MACH ±.5° BEND ±2°
 TWO PLACE DECIMAL ±.010
 THREE PLACE DECIMAL ±.005

INTERPRET GEOMETRIC
 TOLERANCING PER: ANSI Y14.5, 1994

ENGINEERING	NAME	DATE
DRAWN BY ENG.	DS	11/14/08
CHECKED BY ENG.	JK	11/14/08
ENG APPR.	CC	11/14/08
MFG APPR.	CC	11/14/08

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 RECTORSEAL.
 ANY REPRODUCTION IN PART OR AS A
 WHOLE WITHOUT THE WRITTEN
 PERMISSION OF RECTORSEAL IS
 PROHIBITED.



2601 Spenwick Drive,
 Houston, TX 77055
 800-231-3345

TITLE:

AG-T 30x50 SPECIFICATION SHEET

SIZE
A

SCALE: 1:15

SHEET 1 OF 1

5

4

3

2

1

A