
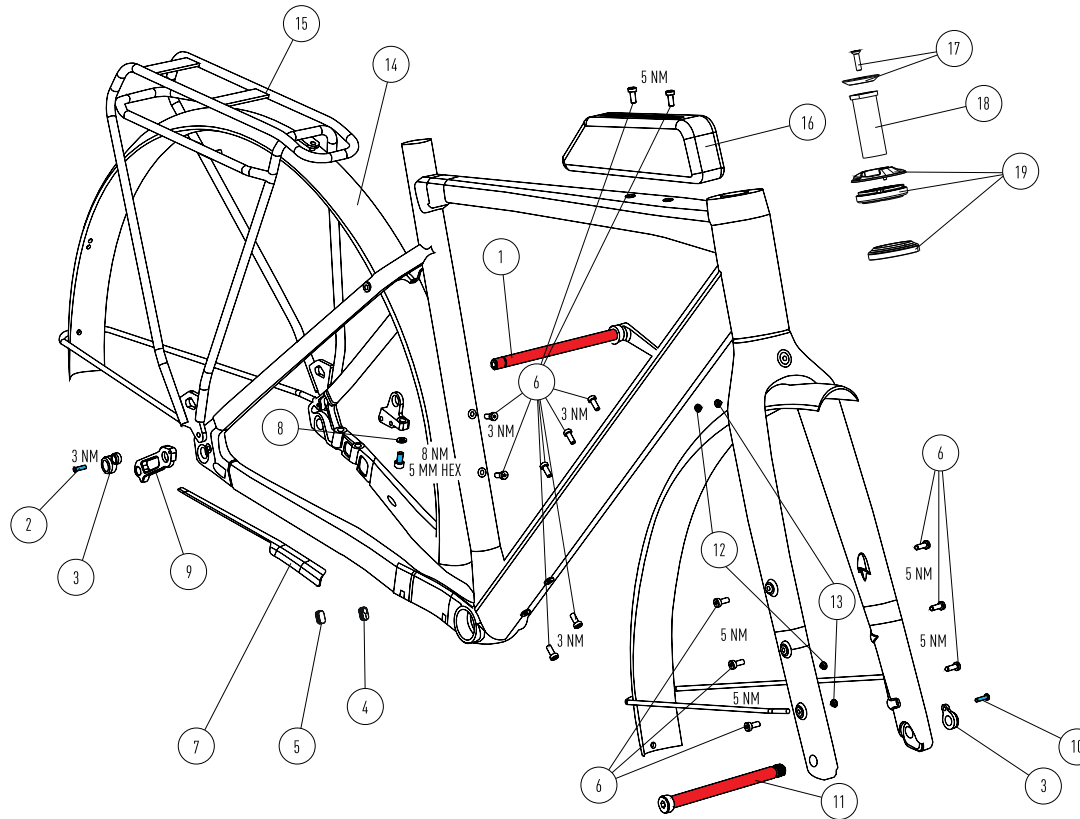


EXPLODED DRAWING

 GREASE
 THREAD LOCK MEDIUM



ATLAS

PP2105 | AL

POS	PART #	PART NAME	QTY
01	KD160221008	REAR AXLE	1
02	KD325919175	DCW M4 X14 SCREW	1
03	KD325919160	THRU AXLE NUT	2
04	KD325921014	DROPPER PLUG (WHEN DROPPER MOUNTED)	1
05	KD325921013	DROPPER PLUG BLIND (WHEN NO DROPPER IS MOUNTED)	1
06	KD199119008	M5X12	15
07	KD325921228	CHAINSTAY PROTECTOR	1
08	AM325921086	KICKSTAND ADAPTER KIT (FOR EQUIPPED SPEC)	1
09	KD325919141	SHIMANO DIRECT MOUNT HANGER	1
10	KD325917005	DCW M4 X10 SCREW	1

11	KD160221009	FRONT AXLE	1
12	KD70525	LIGHT CABLE PLUG	1
13	KD11596001	LIGHT CABLE PLUG BLIND	1
14	AM140121004	F&R FENDER SET	1
15	AM130120022	CARRIER SET	1
16	AM325921244	TOP TUBE BAG SET (ONLY FOR ATLAS 6.9 AND 6.8)	1
17	KD120420029	TOP CAP WITH THE SCREW	1
18	KD120421027	EXPANDER	1
19	KD120420023	BEARING AND BEARING CAP	1

MATERIAL	ALLOY 7005
WHEELSIZE	700C / 12 X 110 - 700C / 12 X 148 / MAX TIRE WIDTH 47MM 27.5" / 12 X 110 - 27.5" / 12 X 148 / MAX TIRE WIDTH 53MM 700C / 12 X 110 - 700C / 12 X 148 / MAX TIRE WIDTH 40MM WITH FENDERS
HEADSET	UPPER IS Ø52MM - LOWER IS Ø52MM
FORK	700C - LENGTH 425MM - RAKE 50MM
SEATPOST / SEATCLAMP	Ø27,2MM - Ø31,8MM - MINIMUM INSERT 100MM
MAX SEATPOST INSERTION	XS: 220MM S: 250MM M: 285MM L: 315MM XL: 340MM
FRONT BRAKEMOUNT	FLATMOUNT Ø160MM - MAX. ROTOR Ø180MM
FRONT AXLE	148MM / Ø12MM / PITCH 1,75
REAR BRAKEMOUNT	FLATMOUNT Ø160MM - MAX. ROTOR Ø180MM
REAR AXLE	175MM / Ø12MM / PITCH 1,75
RD HANGER	FOCUS
FD MOUNT	BAND TYPE
BOTTOM BRACKET	BSA68MM
CHAINRING	MAX CHAINRING SIZE 1BY: 42 CHAINLINE: 49,7MM (SHIMANO) MAX CHAINRING SIZE 1BY: 40 CHAINLINE: 45MM (SRAM) MAX CHAINRING SIZE 2BY: 46/30 CHAINLINE: 47MM (SHIMANO) MAX CHAINRING SIZE 2BY: 43/30 CHAINLINE: 47,5MM (SRAM)
KICK STAND MOUNT	WITH ADAPTOR 18MM
MAX SYSTEM WEIGHT	110 KG