




Model	KE361-DRW KE362-DRW	KE261-DRW KE262-DRW
Device Configurations		
Battery size 61-DRW:	312 Zinc-Air	
Battery size 62-DRW	13 Zinc-Air	
Receiver power levels	LP, MP, HP & UP	
IP Classification	IP 68	
Control Option	Telecoil, DAI (KEx62-DRW only)	
Audiological Features		
WARP compression (WDRC) - number of channels	8	6
Soft Switching	●	●
Multiscope Adaptive Directionality	●	
Adaptive Directionality		●
Environmental Classifier	●	●
DFS Ultra II	●	●
Noise Tracker II	●	●
Wind Guard	●	●
Expansion	●	●
Synchronized Acceptance Manager	●	
Low Frequency Boost (Only UP)	●	●
Tinnitus Sound Generator	●	●
Functional Features		
Synchronized Push Button*	●	
Synchronized volume control **	●	
Smart Start	●	●
Phone Now	●	●
Comfort Phone	●	
Direct audio streaming (MFi, Android™***)	●	
ReSound TV Streamer 2, Remote Control, Remote Control 2, Phone Clip+, Micro Mic and Multi Mic	●	●
ReSound Smart 3D™ app	●	●
ReSound Assist		
Remote Fine Tuning	●	●
ReSound Assist Live	●	●
Remote Firmware Updates	●	●
Fitting Features		
Fitting Software ReSound Smart Fit™ 1.10 or higher	●	●
Fully Flexible Programs	4	4
Auto DFS	●	●
Onboard Analyzer II	●	●
Wireless Fitting with Noalink Wireless	●	●

*Also including functionality for synchronized Push Button Volume Control
 **Only for 62 models
 *** Compatible with Android smartphones that support direct Android streaming to hearing aids.

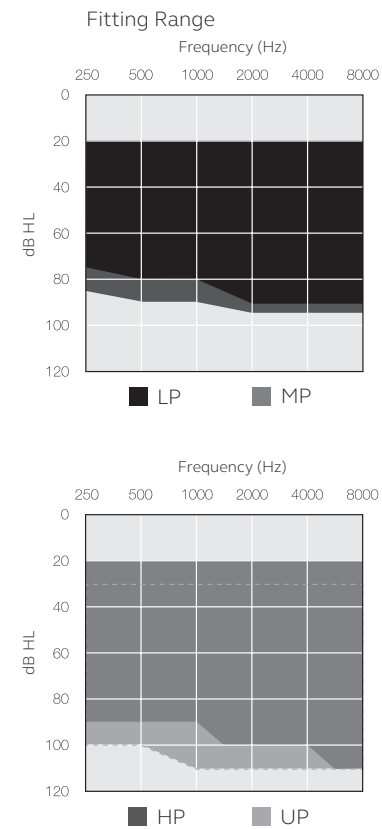

© 2020 GN Hearing A/S. All rights reserved. ReSound is a trademark of GN Hearing A/S. Apple, the Apple logo, iPhone, iPad and iPod touch are trademarks of Apple Inc., registered in the US and other countries. Android is a trademark of Google LLC. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.

Technical specifications

		LP		MP			
		IEC 60118-0: 1983_AMD1:1994 IEC 60118-0:2015(*) IEC 711 Ear Simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	IEC 60118-0: 1983_AMD1:1994 IEC 60118-0:2015(*) IEC 711 Ear Simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler		
Reference test gain (60 dB SPL input)	1600 Hz/HFA	41	32	45	36	dB	
Full-on gain (50 dB SPL input)	Max. 1600 Hz/HFA	62 55	52 46	67 57	58 50	dB	
Maximum output (90 dB SPL input)	Max. 1600 Hz/HFA	123 117	113 109	125 120	116 113	dB SPL	
Total harmonic distortion	500 Hz 800 Hz 1600 Hz	0.9 1.3 0.8	0.5 0.8 0.5	0.4 0.9 0.8	0.3 0.4 0.7	%	
Telecoil sensitivity (1 mA/m input)*	Max.	93	82	97	86	dB SPL	
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	100	91	106	96	dB SPL	
Full-on telecoil sensitivity @ 1mA/m	1600 Hz/HFA	86	76	89	81	dB SPL	
Equivalent input noise, w/o noise reduction		22	21	25	24	dB SPL	
1/3 Octave Equivalent input noise, w/o noise reduction	1600 Hz	9	9	10	11	dB SPL	
Frequency range IEC 60118-0: 2015		100-8580**	100-8000	100-8340**	100-8060	Hz	
Current Drain (Quiescent / Operating) (model KEx61-DRW, KEx62-DRW)		1.13/1.19	1.13/1.28	1.13/1.16	1.13/1.19	mA	
Weight of KE61-DRW (without receiver)		0.98 / 0.03				gram/oz	
Weight of KE62-DRW (without receiver)		1.60 / 0.06				gram/oz	

* Telecoil is only for the KEx62-DRW.
** Measured according to IEC 60118-0:2015, with 711 Ear Simulator coupler.


Technical specifications

		HP		UP			
		IEC 60118-0: 1983_AMD1:1994 IEC 60118-0:2015(*) IEC 711 Ear Simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	IEC 60118-0: 1983_AMD1:1994 IEC 60118-0:2015(*) IEC 711 Ear Simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler		
Reference test gain (60 dB SPL input)	1600 Hz/HFA	49	40	61	47	dB	
Full-on gain (50 dB SPL input)	Max. 1600 Hz/HFA	74 65	65 57	82 79	75 65	dB	
Maximum output (90 dB SPL input)	Max. 1600 Hz/HFA	129 124	120 117	136 136	128 124	dB SPL	
Total harmonic distortion	500 Hz 800 Hz 1600 Hz	0.6 1.5 0.6	0.3 0.7 0.5	1.2 2.2 0.1	1.0 1.6 0.1	%	
Telecoil sensitivity (1 mA/m input)*	Max.	105	95	113	105	dB SPL	
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	110	100	115	108	dB SPL	
Full-on telecoil sensitivity @ 1mA/m	1600 Hz/HFA	97	89	111	96	dB SPL	
Equivalent input noise, w/o noise reduction		24	22	17	23	dB SPL	
1/3 Octave Equivalent input noise, w/o noise reduction	1600 Hz	9	10	10	9	dB SPL	
Frequency range IEC 60118-0: 2015		100-7600**	100-6750	130-5270**	130-4920	Hz	
Current Drain (Quiescent / Operating) (model KEx61-DRW, KEx62-DRW)		1.13/1.16	1.13/1.18	1.14/1.29	1.14/1.21	mA	
Weight of KE61-DRW (without receiver)		0.98 / 0.03				gram/oz	
Weight of KE62-DRW (without receiver)		1.60 / 0.06				gram/oz	

* Telecoil is only for the KEx62-DRW.
** Measured according to IEC 60118-0:2015, with 711 Ear Simulator coupler.

Patents pending

All specifications are subject to change without notice

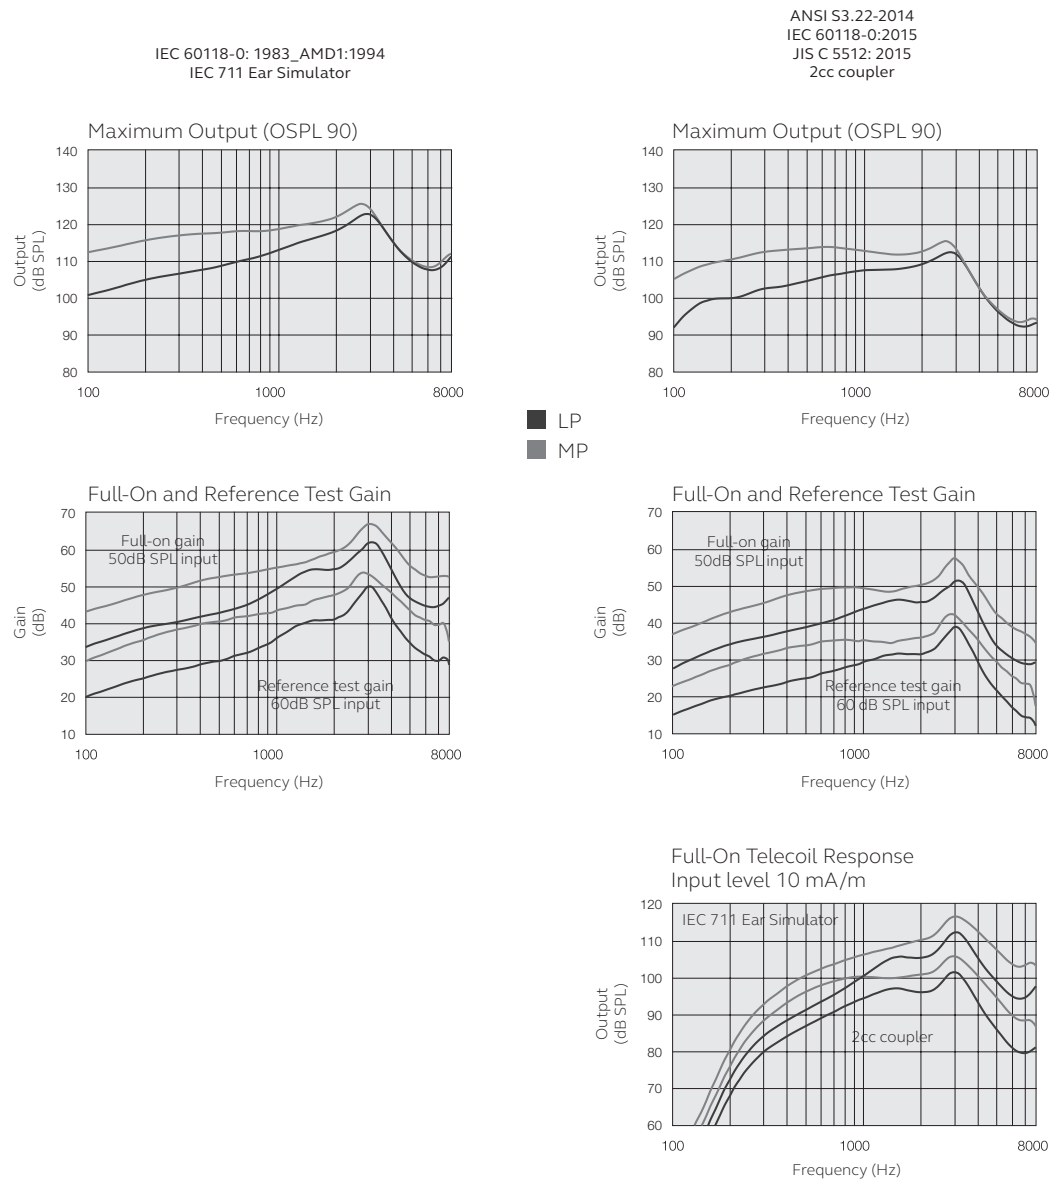

Patents pending

All specifications are subject to change without notice

